


DROP WIRE CABLE



LINK Telephone Drop Wire Cable designed for distribution cable pair from cable terminal to telephone protector.

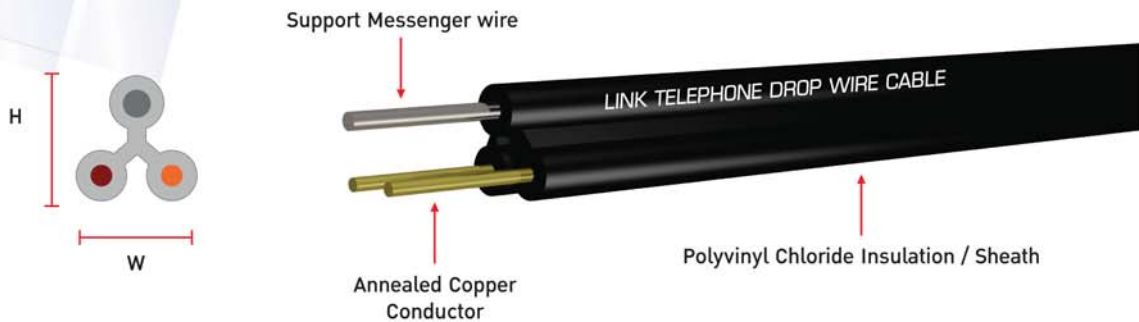

MECHANICAL SPECIFICATIONS

Conductor	Solid Annealed Copper ,19AWG (0.91 mm)
Insulation/Sheath	Polyvinyl Chloride (BLACK),UV-proof
Messenger Wire	1.2 mm ,Extra High Strength Galvanize Steel Wire

ELECTRICAL CHARACTERISTICS

Max.Conductor DC Resistance (Ω /km)	28.5
Min.Insulation Resistance (M Ω ·km)	400
Dielectric Strength between Pairs (kV/min)	1.5

ORDER INFORMATION

LINK P/N	Number of Cores	Conductor diameter		Insulation diameter (mm.)	Overall diameter (mm.)		Packaging
		mm.	AWG		H	W	
UL-0023	2	0.91	19	1.16	6.8	8.1	200M./Roll

JUMPER WIRE CABLE

LINK Telephone Cable Jumper Wire is designed for connecting terminal equipment.

MECHANICAL SPECIFICATIONS

Number of Pair	: 1
Wire Gage	: 24 AWG (0.5 mm.)
Conductor	: Solid Bare Copper
Insulation	: Polyvinyl Chloride (PVC)
Diameter	: 1.1060.05 mm.



Easy Box

ORDER INFORMATION

LINK P/N	Description	Packaging
UL-0002	JUMPER WIRE WHITE-RED 2 CORE	100 M./Easy Box