


## Fig.8 UTP Dropwire 1 pair

LINK FIG.8 UTP Drop wire cable designed to use for outdoor connections between telephone distribution points and subscriber premises.

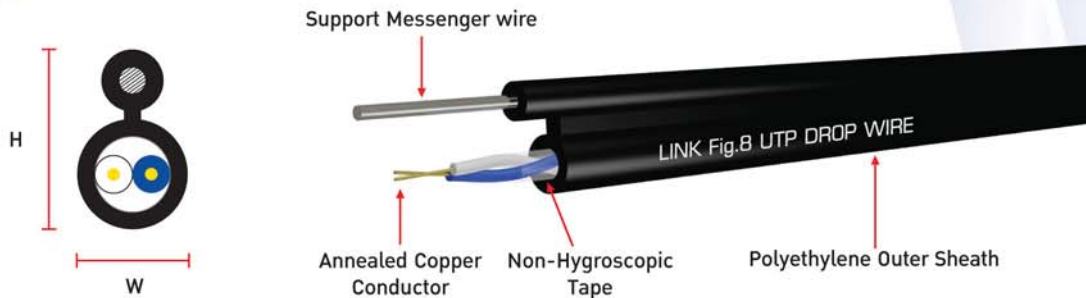

### MECHANICAL SPECIFICATIONS

Conductor	Solid Annealed Copper
Insulation	High density polyethylene (HDPE)
Identification	1 pair : white and blue
Core Covering	Non-Hygroscopic Tape
Outer Sheath	Polyethylene (PE)
Messenger Wire	1.2 mm, Extra High Strength Galvanize Steel Wire

### ELECTRICAL CHARACTERISTICS

Test Item	Conductor diameter mm. (AWG)	
	0.50 (24)	0.65 (22)
Max.Conductor DC Resistance ( $\Omega$ /km)	92	58
Unbalance of Pair DC Resistance (%)	5	5
Dielectric Strength between Pairs (kV/min)	1	1.5
Min.Insulation Resistance ( $M\Omega$ ·km)	5000	5000

### ORDER INFORMATION

LINK P/N	Number of Pairs	Conductor diameter		Insulation Thickness (mm.)	Sheath Thickness (mm.)	Overall diameter (mm.)		Packaging
		mm.	AWG			H	W	
UL-1102	1	0.50	24	0.20	1	7.5	4.5	200M./Roll
UL-1112	1	0.65	22	0.25	1	8.0	5.0	200M./Roll

## TELEPHONE FLAT CABLE

LINK Telephone Flat Cable is designed for telephone handset cord or line cord.

### MECHANICAL SPECIFICATIONS

Number of Cores :	4
Wire Gage :	26 AWG & 28 AWG
Conductor :	Stranded Bare Copper
Insulation :	Polyvinyl Chloride (PVC)
Jacket :	Polyvinyl Chloride (PVC)



Easy Box

### ORDER INFORMATION

LINK P/N	AWG	Number of Cores	Conductor Strandings No./mm.	Insulation O.D. mm.	Jacket O.D. mm.	Packaging
UL-0044	28	4	7/0.12	0.95	2.5 x 5.0	100 M./Easy Box
UL-0054	28	4	7/0.16	1.05	2.5 x 5.0	100 M./Easy Box